

Ride-on Trowels
1220mm/48inch

CRT 48-34V

CRT 48-35V CRT 48-35L

The best solutions for your concrete job site

» WACKER's line of 48-inch ride-on trowels offers high productivity and quality results. Featuring a patent-pending torsion assist steering system, these trowels are easy to operate and reduce operator fatigue. A rigid, heavy-duty frame leads to more responsive steering and excellent feedback from the concrete conditions. Ergonomic twin lever control makes for excellent maneuverability. «



WACKER

- ▣ Reliable
- ▣ Trustworthy
- ▣ Accessible
- ▣ Responsive

Additional Advantages:


- + Units offer the highest blade speeds in mechanical drive ride-on trowel class for higher productivity and better finishes.
- + Improved durability with a clutch and belt specifically designed for ride-on trowel applications
- + A center engine design provides for better visibility and protection of engine components.
- + Three engine choices include a value air-cooled Vanguard, a liquid-cooled diesel Lombardini and a premium liquid-cooled Vanguard.
- + Ideally suited for panning and burnishing applications.



Technical Data		CRT 48-35V	CRT 48-34V	CRT 48-35L
Operating size (l x w x h)	in (mm)	101 x 51 x 58 (2566 x 1295 x 1473)	101 x 51 x 58 (2566 x 1295 x 1473)	101 x 51 x 58 (2566 x 1295 x 1473)
Operating weight	lb (kg)	1130 (508)	1240 (558)	1340 (603)
Shipping size (l x w x h)	in (mm)	107 x 55.75 x 64 (2718 x 1416 x 1626)	107 x 55.75 x 64 (2718 x 1416 x 1626)	107 x 55.75 x 64 (2718 x 1416 x 1626)
Shipping weight	lb (kg)	1470 (662)	1580 (711)	1680 (756)
Trowel diameter	in (mm)	48 (1220)	48 (1220)	48 (1220)
Number of blades		10	10	10
Combination blade size	in (mm)	18 x 8 (457 x 203)	18 x 8 (457 x 203)	18 x 8 (457 x 203)
Finish blade size	in (mm)	18 x 6 (457 x 152)	18 x 6 (457 x 152)	18 x 6 (457 x 152)
Float blade size	in (mm)	18 x 10 (457 x 254)	18 x 10 (457 x 254)	18 x 10 (457 x 254)
Speed range	rpm	25-165	25-165	25-165
Pitch range	degrees	0-25	0-25	0-25
Engine type		4-stroke V-Twin air-cooled gasoline Briggs&Stratton Vanguard	4-stroke, 3-cylinder liquid-cooled gasoline Briggs&Stratton Vanguard	4-stroke, 4-cylinder liquid-cooled diesel Lombardini
Operating speed	rpm	3800	3800	3800
Piston displacement	in ³ (cm ³)	61 (993)	58 (950)	84 (1370)
Horsepower (at 3800 rpm)	hp (kW)	35 (26,1)	34 (25,4)	35 (26)
Fuel tank capacity	gal (l)	6.5 (24,6)	6.5 (24,6)	6.5 (24,6)
Fuel consumption	qt (l)/h	11 (10)	11 (10)	6.5 (6,2)

Standard Package	
Ride-on Trowels CRT 48-35V CRT 48-34V CRT 48-35L	includes operator's manual, parts book and CE certificate.

Model Guide
CRT = Ride-on trowel 48 = Trowel diameter in inches 34/35 = Engine class V = Vanguard engine, L = Lombardini engine
Please refer to our Price List and Ordering Guide for complete accessory information.

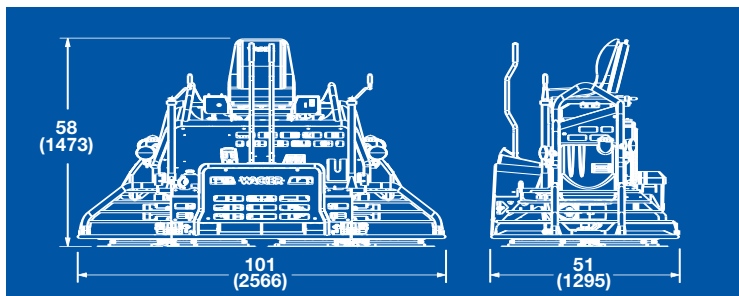

Specifications may change due to continuous product development.